CONCRIB
Maximising Land Values

STONE STRONG systems

07 3375 1800
www.stonestrong.com.au
www.concrib.com.au

STONESTRONG AUSTRALIA
PILED RETAINING WALLS

- Standard 24SF at 1.1m wide and 1.6 & 2.2 metre wide blocks can be piled through.
- Pile sizes range from 550mm to 950mm OD at pile spacing from 1.22m centres upwards.
- Piling design for range of situations including bearing capacity, global stability, sliding and over turning.
- Alternative piling options available for Shear piles at rear of wall.
- Photos show pile design with footing beam for global stability wall founding in organic and soft soils – alternative through pile options without footing beam available.

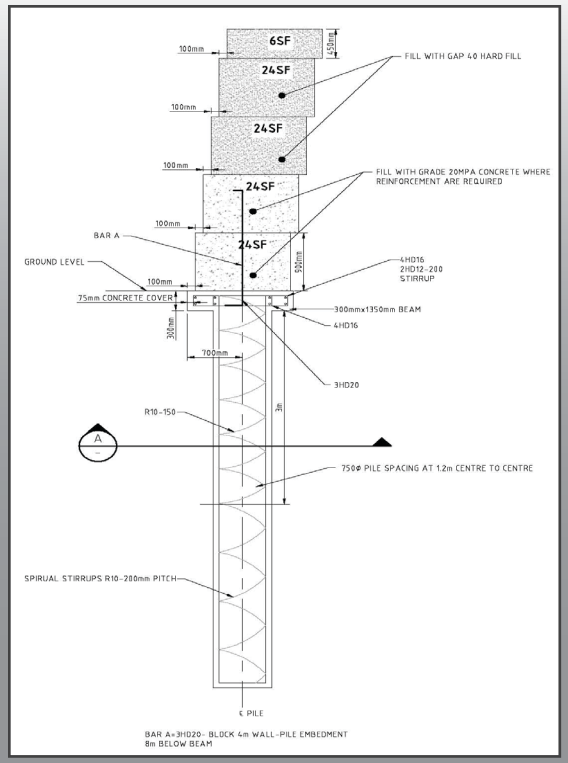

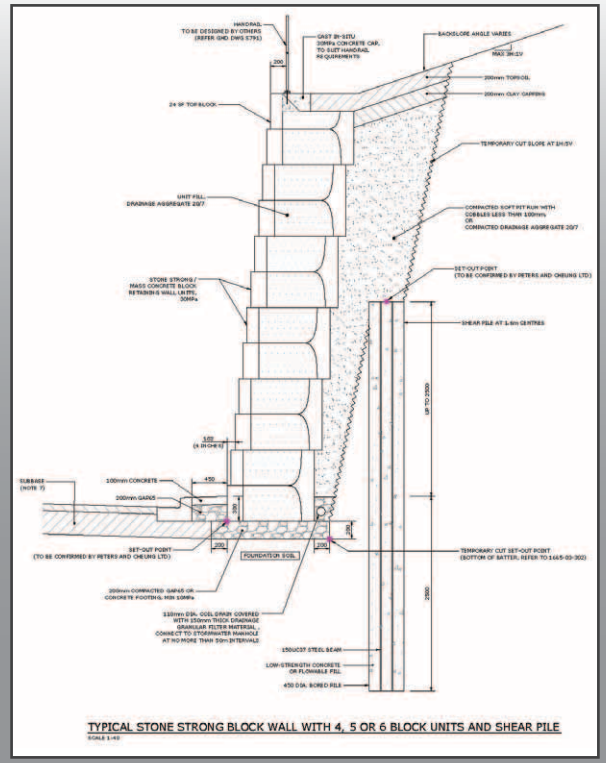

Stonestrong components are manufactured to AS3600, Concrete Structures Code, and the systems are designed and installed to meet AS4678, Earth Retaining Structures Code.